



To Utilize Geothermal Potential for Milk Pasteurization: A Quantitative Thermodynamic Study of Geothermal Hotspot Unabdeo in Jalgaon District

Mahesh Mahajan

Government College of Engineering Jalgaon (An autonomous Institute of Government of Maharashtra)

Abstract- There are many geological faults which were created during evolution of Deccan peninsula. Through these faults geothermal fluid flows. Here in SONATA (Son-Narmada-Tapti river) region near Jalgaon nearly 7 geothermal hot springs were detected in 1991 study [1]. In this paper, particularly the study of “Unabdeo” is conducted. This study focuses on the amount of energy which can be effectively utilized or can be extracted for the beneficial of local ‘Adiwas’ people. The study conducted shows that the available discharge on the surface is naturally 17280-69120 LPD at an average temperature of 50°C, this study also focuses on the temperature variation with day hours, and also to check viability of this heat energy utilization for commercial use.

Key words- Unabdeo, SONATA, Efficiency, heat, cost.

I. INTRODUCTION

A hot spring is produced by the emergence of exothermally heated groundwater that rises from the crust. Water issuing from a hot spring is heated exothermally, that is, with heat produced from the Earth's mantle [6]. As we know, the temperature of rocks within the earth increases with depth. The rate of temperature increase with depth is called as the geothermal gradient. India has an estimated geothermal power potential, which is about 10,600 MW but this potential is entirely undeveloped at present [3]. The ‘Geothermal Atlas of India’ published by the Geological Survey of India (GSI) in 1991 describes some 340 hot spring sites and identifies more than 300 sites with geothermal potential in at least seven key geothermal provinces throughout India [2]. Maharashtra government official statement was released stating that Jalgaon itself has a geothermal potential of 2000 MW[11] as this area comes under sonata region and also a geological study was conducted after the release of statement, but data was not disclosed publically. This area has

natural hot springs which are perennial and the temperature was noted by officials as follows Kundawa (temp 44°C and 25LPD), Anakdeo (44°C and 45LPD), Unabdeo (60°C and 38LPD), Ramtalab (40°C and 24LPD), Nazardev (40°C and 16LPD) Indave (41°C and 30LPD), Khadgaon (38°C and 10LPD) [5]. The problem associated with this locations is that it has low temperature which are usually recorded at 170 feet deep bore well and minimum temperature required for energy production is 85°C by using binary cycle it is expected that the temperature will exceed 120°C with 3000 meter depth of bore well [4]. The temperature variations with day hours is also studied here, to check whether is there any variation's in temperature with day hours heating and cooling as in the morning the temperature of atmosphere of Unabdeo was found to be 20°C while that in afternoon it was higher up to 32°C; for such low temperature water which has higher Sulfur content and can be utilized for secondary applications which can be 1) To dry onion (84% moisture) 2) To dry Banana (4% moisture) 3) To pasteurize the milk 4) mushroom farming 5) egg hatching [5]. When we look at global banana production nearly 16% [6] of India's banana production is through Jalgaon and that is 3% world's production [10][8]. At the same time the most promising is milk pasteurization because of market availability in the production area itself. As that of 809000 livestock animals are there in Jalgaon district itself [9], so this locally produced milk can be pasteurized and sold to get geothermal energy benefit through it. Therefore this study mainly focuses on the milk pasteurization only. Here the counter flow heat exchanger is designed because it has maximum effectiveness and it will give us maximum output and cost effectiveness.

II. VAT MILK PASTEURIZATION

The long hold or vat pasteurization is a batch type method

where the pasteurization is carried out at 63°C for 30 min. As available average temperature of water is 50°C and also by using bore well pump, we can get 350 kg/sec water as heated input water.

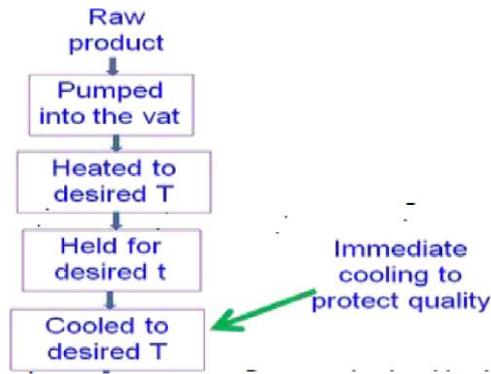


Figure II.1 VAT Process



Figure III.2 location of site 4

IV. DATA GATHERED

A. Aim

- 1) To identify the maximum and minimum temperature variation of geothermal fluid
- 2) To calculate the maximum discharge in LPD at different sites
- 3) To specify a certain region which will be easily accessible
- 4) To give list of activities which will utilize geothermal fluid
- 5) To give economical perspective for viability of commercial activities

B. Instrument used for studies

- 1) Pyrometer – digital gm. 320 infrared thermometer non-contact pyrometer IR laser point gun with backlight of range 50-380 degree ±1.5%
- 2) 1 liter can
- 3) Timer with 100millisecond accuracy

C. Procedure

- 1) Keep timer ready and measure the time required for 1 liter to get filled.
- 2) At same time measure the maximum and minimum temperature of the water.
- 3) From time calculate measure the discharge of water per minute.
- 4) Keep location of Gomukh as reference and measure the distance of site from Gomukh.

D. Temperature distribution of various sites (Appendix 1)

V. CALCULATIONS

A. To calculate the mass flow rate of fluids

Mass of milk to be processed in one day =20000Lt

Consider 2 shifts

As it is a process industry

Consider 1 shift is of 12 hours including 1 hour of rest and lunch time and 1 hour of loading milk and starting machines

Total time available =12-2=10hr

Consider 1 batch requires 30 minutes and 10 min loading and unloading time

Total time for 1 batch=40 min

No of batches=10*60/40=15 batches in one shift

Volume of water processed in one shift=10000Lt

Volume of milk handled by each batch=10000/15=666.67 Lt or 700Lt

Q=700Lt per batch

Mass flow rate of milk while exchanging heat =700/1800=0.389 Lt/sec

Mass of milk flow=Q*density of milk

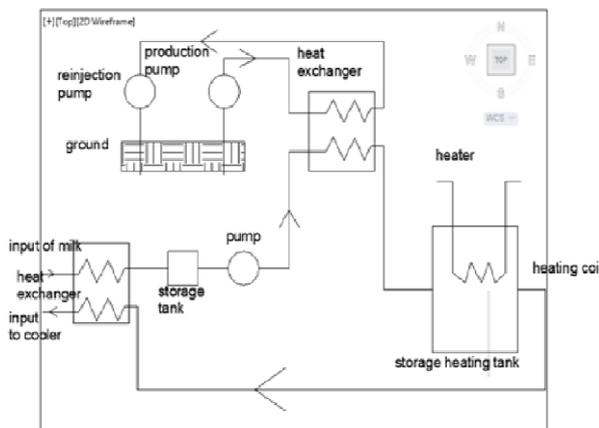


Figure II.2 Milk Pasteurization Plant Layout

III. LOCATION OF SITES



Figure III.1 Position of site 1, 2, 3, 5, and 6.

$$=0.389*1034=0.402 \text{ Kg/sec}$$

Consider the inner diameter of tube to be $D1 = 20\text{mm}=0.02\text{m}$

$$Q=3.142*0.2*0.02^2*\text{velocity of milk}$$

$$V1=1.2378\text{m/sec}$$

Let outer diameter of inner tube to be $D2 = 24\text{mm}=0.024\text{m}$

$$Re=\text{density of milk}*V1*D1/\mu$$

For fresh milk the viscosity varies as $\mu=2.64\pm 0.21 \text{ mPa.s}$

So consider average viscosity as $=0.00264 \text{ Pa.s}$ [7]

$$Re=9696.1 > 3000$$

Therefore it is Turbulent flow

To calculate heat transfer coefficient of inner tube side ($h1$)

We know from Adib & Vasseur (2008) equation for non-nucleating turbulent milk flowing in a tube we have

$$h1=3.8*Re^{0.4}Pr^{0.65}$$

for $1600 < Re < 21000$ Pr lies in $1.77 < Pr < 5.7$

By interpolating we have $Pr=3.41$

$$h=331.6793 \text{ W/M}^2\text{K}$$

B. To design outer tube

Crompton 150W8D10 Submersible Pump set 10 HP

Type of Product: Bore well Submersible Pump Set [12][13]

Suitable For: 150 mm Boring

Head (mm): 82-26

Discharge Range: 105-355 LPM

Consider $Q=120\text{LPM}$

$$\text{Density}=1000\text{Kg/m}^3$$

$$Q2=2\text{Lt/sec}$$

$$M2=2\text{Kg/sec}$$

Let diameter of inner side of outer tube $D3=40\text{mm}=0.04\text{m}$

$$Q2=V2*3.142*0.25*(0.04*0.04)$$

$$V2=1.5915 \text{ m/s}$$

$Re2=V2*\text{density of water}*effective diameter/\text{viscosity of water}$

$$\text{Effective diameter}=D3-D2=0.016\text{m}$$

Average temp of water in outer tube $=50^\circ\text{C}$

At this temperature we have the water properties as follows

$$K(50^\circ\text{C})=0.6305\text{W/m.K}$$

$$\text{Density}=988\text{Kg/M}^3$$

$$Pr=3.628$$

$$\mu=0.0005471$$

$$Cp=4181 \text{ J/Kg.K}$$

$$Re2=45985.07 > 10000$$

So it is a turbulent flow

Friction factor for forced flow in tube is given by Petukhov

Equation

$$F=(0.790\ln Re2-1.64)^{-2}$$

For $3000 < Re < 5000000$

$$F=0.02136$$

Nusselt number (Nu)=

$$(f*Re*Pr/8)/(1.07+(12.7((f/8)^.5)(pr^{.427-1})))$$

$$Nu=226.9495$$

$$Nu=h.D/K$$

$$h2=8943.23 \text{ W/m}^2\text{K}$$

C. To calculate the overall heat transfer coefficient (U)

Consider tube length $=200\text{m}$

$$A1=3.142*.02*200=12.5664\text{m}^2$$

$$A2=3.142*0.024*200=15.07965 \text{ m}^2$$

$$As=3.142*0.023*200=14.4513 \text{ m}^2$$

$$H1=331.6793 \text{ W/m}^2\text{K}$$

$$h2=8943.23 \text{ W/m}^2\text{K}$$

Consider, the inner tube made of aluminum having $K=237.46$

W/m.K

Fouling factor for both inner and outer surfaces to be =

$$F0=F1=0.0001$$

$$(1/(UA_s))=(1/(h_1A_1))+1/(h_2A_2)+(F_1/A_1)+(F_2/A_2)+(\ln(D_2/D_1))/(2*3.142*L*K)$$

$$U=263.9386 \text{ W/m}^2\text{K}$$

$$NTU=UA_s/C_{min}$$

$$C_{water}=2*4182=8364 \text{ KJ/K}$$

$$C_{milk}=0.402*3920=1575.84 \text{ KJ/K}$$

$$C_{milk} < C_{water}$$

$$C_{min}=1575.84 \text{ KJ/K}$$

$$C=(C_{min}/C_{max})=0.1884$$

$$NTU=2.42045$$

For counter flow heat exchanger

$$\epsilon=(1-\exp(-NTU*(1-C)))/(1-C \exp(-NTU*(1-C)))$$

$$\epsilon=0.8830919$$

$$\epsilon=(T_{co}-T_{ci})/(T_{hi}-T_{ci})$$

$$T_{co}=47.07^\circ\text{C}$$

$$T_{ho}=45.84^\circ\text{C}$$

$$T_{Lm}=T_{in}-T_{out}/(\ln(T_{in}/T_{out}))=9.1290^\circ\text{Ct}$$

D. Revenue generated

$$\text{Heat rate}=C_{min}*(T_{co}-T_{ci})=34.794\text{KW}$$

$$\text{Time}=54000 \text{ seconds}$$

$$\text{Energy saved per month}=54000*34.794*30=56366280 \text{ KJ}$$

Electricity bill for small scale industry for 1 KWHr is 8.43 Rs.

$$\text{Money saved}=15657.3 \text{ INR per month}$$

$$\text{Per year it will save}=1583892.468 \text{ INR.}$$

$$\text{Return on Investment}=5 \text{ months.}$$

VI. CONCLUSION

“Unabdeo” field has perennial water flow and maximum temperature of water was found to be 50°C and water flow with pump was calculated to be 120LPM. The discharge of water was varying from position 1 to 6 as per the technology used and at some sites it was natural so variation in discharge was from 2-240 LPD. Here some part of study was done in forest reserve area and some part was studied outside of forest reserve area and the total area covered was 1 km^2 and as per officials say it was nearly 1 km^2 where geothermal potential exist. Further study can be conducted to study viability of drying banana and onion which has great potential supplier market in Jalgaon. Using heat exchanger we can save up to 15 lacks per annum. Jalgaon district has enormous potential of geothermal resources that has to be properly utilized and not only that the presence of abundance of solar energy can be utilized in hybridization with geothermal energy to boost the regional industry such as banana drying and onion drying. This 2000MW of energy can be utilize for the benefit of the local Adiwasi people without harming the local environment and tourism sector of this area.

VII. REFERENCES

- 1) I.D. Gupta, “Delineation of probable seismic sources in India and neighborhood by a comprehensive analysis of seism tectonic characteristics of the region”, Central Water & Power Research Station, Khadakwasla, Pune-411 024, India Accepted 3 December 2005 <https://doi.org/10.1016/j.soildyn.2005.12.007>.
- 2) J.Craig, A.Absar, G.Bhat, G.Cadel, M.Hafiz, N.Hakhoo, R.Kashkari, J.Moore, T.E.Ricchiuto, J.Thurow, B.Thusu, “Hot springs and the geothermal energy potential of

Jammu&Kashmir”,<https://dx.doi.org/10.1016/j.earscrev.2013.05.004>.

3) Harish Puppala, Shibani K. Jha , “Identification of Prospective Significance Levels for Potential Geothermal Fields of India”,<http://dx.org/10.1016/j.renene.2018.04.075> .

4) Chandra S. Dubey, “Development and role of geothermal resources in India” ,Department of Geology, University of Delhi, Delhi 110007, India , [https://doi.org/10.1016/0375-6505\(88\)90074-0](https://doi.org/10.1016/0375-6505(88)90074-0).

5) Sahu R.N., “Applications of Geothermal Resources of Tapi Valley to Generate Electricity Using Binary Liquid Technology”,. Department of Applied Geology, Barkatullah University, Bhopal – India 462 026 <https://www.geothermal-energy.org/pdf/IGAstandard/WGC/2010/0607.pdf> .

6) Branka Trc̃ek and Hans Zojer, “Recharge of springs”,University of Maribor, Faculty of Civil Engineering, Maribor, Slovenia. Joanneum Research, Institute of Water Resources Management, Graz, Austria <https://doi.org/10.1016/B978-1-85617-502-9.00003-7>.

7) Properties of milk OUAT- College of Agricultural Engineering and Technology Dept. of Agricultural Processing and Food Engineering Course: Dairy and Food Engineering

8) Banana Y Israeli, Regional Center for Agricultural Research, Zemach, Israel E Lahav, Regional Experiment Station, Acre, Israel.


9) Dairying in Maharashtra a statistical profile 2015 by Govt. of Maharashtra.

10) <http://jalgaon.wtsg.in>

11) Jalgaon all set to become geothermal power hub Makarand Gadgil . Mumbai Last Updated at February 6, 2013 05:34 IST business standard.

12) www.industrybuying.com Crompton 150W8D10 Submersible Pump set 10 HP

13) www.industrybuying.com Kirloskar 15 HP Bore well Submersible Pump Set 80HHN-1518 SF.

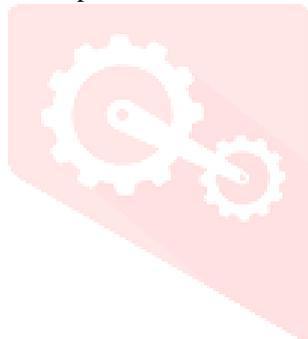

Appendix 1



Figure VII.1 Temperature Distribution of Site 1



Figure VII.4 Temperature Distribution of Site 4

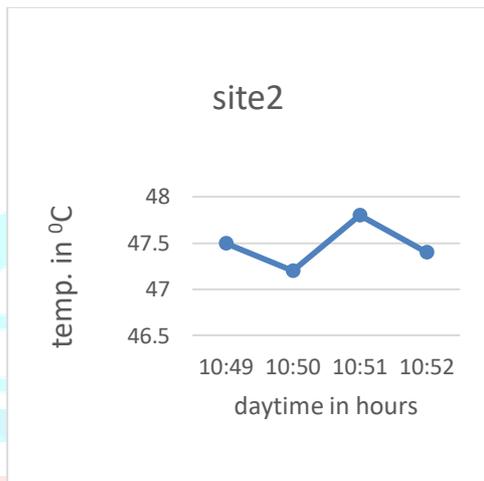


Figure VII.2 Temperature Distribution of Site 2

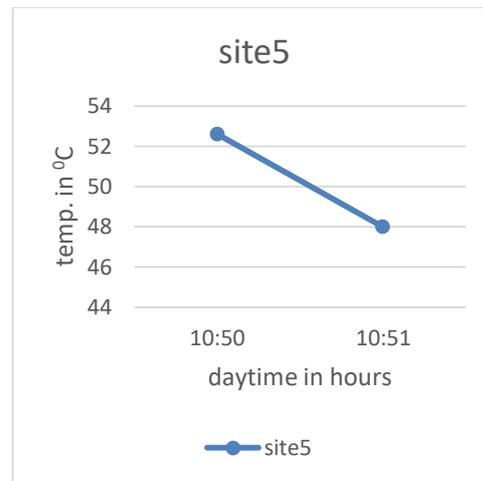


Figure VII.5 Temperature Distribution of Site 5

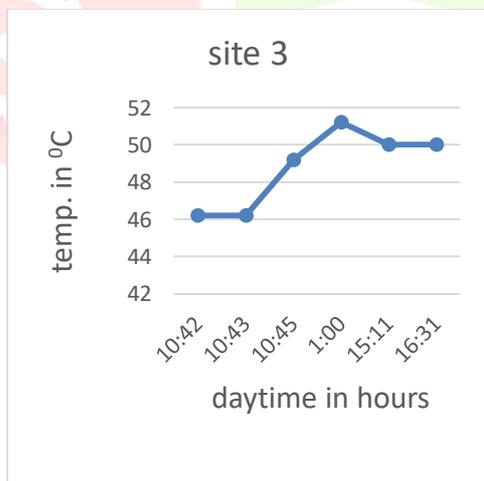


Figure VII.3 Temperature Distribution of Site 3

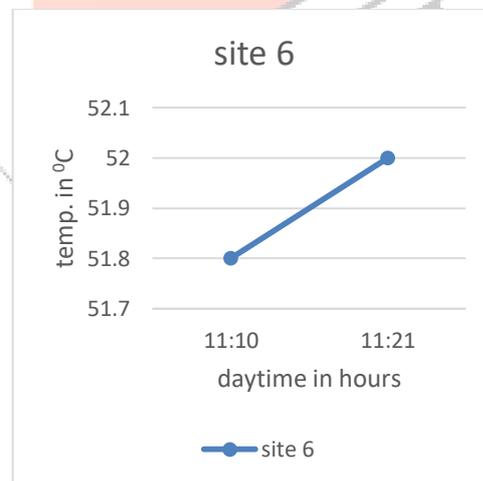


Figure VII.6 Temperature Distribution of Site 6

Graphs of various sites and there temperature variation with daytime in hours, respectively of site 1 to 6