

STUDY ON CONTROL OF A DC-SERVOMOTOR WITH SLIDING MODE CONTROLLER

¹ Green Maraiya

¹ Assistant Professor

¹Electrical Engineering Department

¹ Rajasthan Institute of Engineering & Technology Jaipur, Rajasthan

Abstract : The main objective of this paper is to control the speed of separately excited DC Motor using a Sliding mode controller based on VSS approach. This controller is based on variable structure systems which aim at reducing the peak overshoot, steady state error and settling time of a DC Motor. The simulation results show that Sliding mode controller is superior than PI for speed control of DC motor. Since the SMC is robust in presence of disturbances, the desired speed is perfectly tracked.

IndexTerms - Variable structure control, Sliding mode controller, DC motor drives.

I. INTRODUCTION

The variable structure systems (VSS) consist of a set of continuous subsystems with proper switching logic and, as a result, control actions are discontinuous functions of system states, disturbances and reference inputs. The dominant role in VSS theory is played by sliding modes, and the main idea of designing VSS control algorithms consists of enforcing this type of motion in some manifolds in system state spaces.

When there are disturbances and uncertainties in a system, an appropriate control should be designed so that the system stability and desired system responses are achieved. Sliding mode control

(SMC) is insensitive in the presence of external uncertainties and disturbances, particularly, to the so-called matched uncertainties. The robustness properties of SMC have led this approach to be an intensive, popular and suitable method for the control of wide classes of linear and nonlinear systems. Various SMC approaches have been evolved during the last three decades comprising of practical implementation of SMC and theory development of SMC.

PI controllers have a simple control structure, inexpensive cost, many proposed systematic tuning methods, and have been used for more than half a century. However, when the system is nonlinear but known or where there are bounded uncertainties in the system, PI controllers are not perfectly able to stabilise the system, particularly, when the nonlinearity is very high or the bound of uncertainty is large. In many practical problems, almost perfect disturbance rejection or control performance is required. SMCs may be applied to the system to obtain these performances. An SMC enforces the system trajectories to move on a prespecified surface and remain on it thereafter. On the other hand, a discontinuous SMC may be approximated by a continuous control. In fact, the trajectories tend to an equilibrium point within a boundary of the sliding surface. When the trajectories move on the sliding surface, the system is internally controlled by a virtual control, the so-called equivalent control. SMCs are insensitive in the presence of uncertainties and unmodelled dynamics.

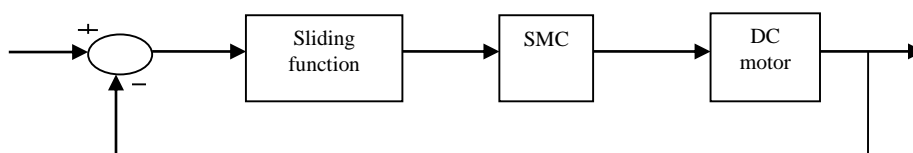


Fig -I Block diagram of DC motor using SMC

II. SLIDING MODE CONTROL

The Sliding mode control is one way of approach to **Variable Structure Control**. In many practical problems, almost perfect disturbance rejection and set point tracking are required. SMC may be applied to such systems to obtain these performances. VSC has non-linear feedback, which is discontinuous in the nature. The control is called non-linear because the control input more control limits. Using this control as a feedback the structure of the system can be altered or switched as its state crosses each discontinuity surface. This closed loop system is described as Variable Structure Control System or Variable Structure System. The state crosses and re-crosses the surface, called switching surface or sliding surface and then continuously lies on the switching surface, when error and rate of change of error become zero. This type of motion is called Sliding Motion. To emphasize the importance of the sliding motion, the control is often called as Sliding Mode Control. When the trajectory moves on the sliding surface, the system is internally controlled by the so called equivalent control.

DC motors are extensively used in robotics and electrical equipment's. Therefore, the control of the speed of the DC motor is very important and has been studied since the early decades in the last century. Generally, the DC motor systems have uncertain and nonlinear characteristics which degrade performance of controllers. Based on these reasons, Sliding Mode Control (SMC) is one of the popular control strategies and powerful control technology to deal with the nonlinear uncertain system. It is often used to handle any worst-case control environment such as parametric perturbations with lower and upper bounds, external disturbances, stick-slip friction, and etc. Precise dynamic models are not required and its control algorithms can be easily implemented. However, the robustness of the sliding control strongly depends on specified parameters in designing of the sliding function.

III. Generation of the control signal for SMC

DC motors are widely used for industrial and domestic applications. Examples are as robotic and actuator for automation process, mechanical motion, and others. Accurate speed control of the motor is the basic requirement in such applications. The electric circuit of the DC motor is shown in Fig. 1. Objective is to control the speed of the motor by armature voltage control. The reference signal determines the desired speed. For simplicity, a constant value as a reference signal is given to the system to obtain desired speed.

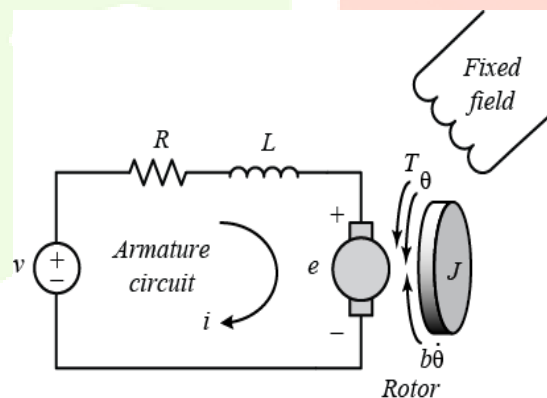


FIG -2 THE STRUCTURE OF DC MOTOR

The differential equations governing the dynamics of the system is given by

$$\tau(t) = J \frac{d\omega}{dt} + B\omega(t) \dots\dots\dots (1)$$

The torque τ generated by the armature current in Nm is given by

$$\tau(t) = k_t i_a(t) \dots\dots\dots (2)$$

This in turn is assumed to satisfy Kirchhoff's voltage law

$$V_a(t) - E_b(t) = R_a i_a(t) + L_a \frac{di_a}{dt} \dots\dots\dots (3)$$

E_b Represents electromotive force given by

$$E_b(t) = K_b(t)\omega(t) \dots\dots\dots (4)$$

Where

ω = angular velocity in rad / s .

J =represents the moment of inertia in kgm^2 .

B =coefficient of viscous friction Nms .

i_a = armature current Amp.

K_t = torque factor constant Nm / Amp .

R_a And L_a = Resistance in Ω and inductance H.

E_b =Back emf constant in Vs / rad

Using above equations, one can write state model with the ω and i_a as state variables and as V_a manipulating variable, as given below.

$$\begin{bmatrix} \frac{d\omega(t)}{dt} \\ \frac{di_a(t)}{dt} \end{bmatrix} = \begin{bmatrix} \frac{-B}{J} & \frac{K_t}{J} \\ \frac{-K_b}{J} & \frac{-R_a}{J} \end{bmatrix} \begin{bmatrix} \omega(t) \\ i_a(t) \end{bmatrix} + \begin{bmatrix} 0 \\ \frac{1}{L_a} \end{bmatrix} V_a(t) \dots\dots\dots (5)$$

Table1
Parameter of DC motor

$R_a = 0.6\Omega$	$K_b = 0.8Vs / rad$
$L_a = 0.012H$	$J = 0.0167kgm^2$
$K_t = 0.8Nm / A$	$B = 0.0167Nms$

Using the parameters given in Table 1, transfer function of the DC motor with angular velocity as controlled variable and input terminal voltage as manipulating variable is determined as given below.

$$\frac{\omega(s)}{V_a(s)} = \frac{3992.015}{s^2 + 51s + 51.39} \dots\dots\dots (6)$$

In time domain the above equation can be

$$\ddot{\omega}(t) + 51\dot{\omega}(t) + 51.39\omega(t) = 3992.015V_a(t) \dots\dots\dots (7)$$

Now consider

$$x_1 = \omega(t) \text{ and } u = V_a(t)$$

Then the system can be converted in the following canonical form

$$\dot{x}_1 = x_2$$

$$\dot{x}_2 = -51.39x_1 - 51x_2 + 3992.015u \dots\dots\dots(8)$$

$$y = x_1 \dots\dots\dots (9)$$

Now select the sliding surface

$$\sigma = c(r - x_1) + x_2 \dots\dots\dots (10)$$

Where c is the constant of sliding matrix $c_\sigma = R^{m \times n}$ such that $c < 0$ The total control law is

$$U = u_{eq} + u_c$$

$$U = \frac{1}{3992.015}(51.39x_1 - (c-51)x_2 - k\text{sign}(s))$$

Where $K > 0$ is selected sufficiently large. Larger the value of K the faster the trajectory converges to the sliding surface.

This function is given as control input to the DC motor model to control the speed of it.

IV. SIMULINK IDEA FOR SLIDING MODE CONTROL

In order to control the speed of DC motor using sliding mode control we need to design the motor as per our convenience to give our sliding mode control signal which is derived above as input.

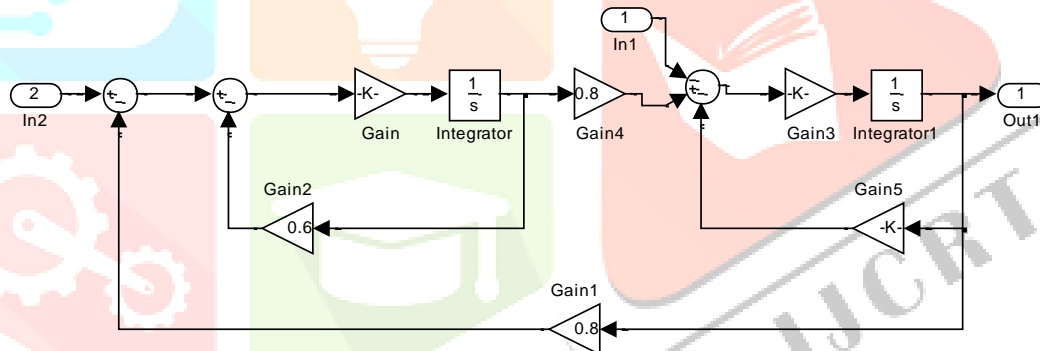


FIG-3 SIMULINK MODEL FOR DC MOTOR



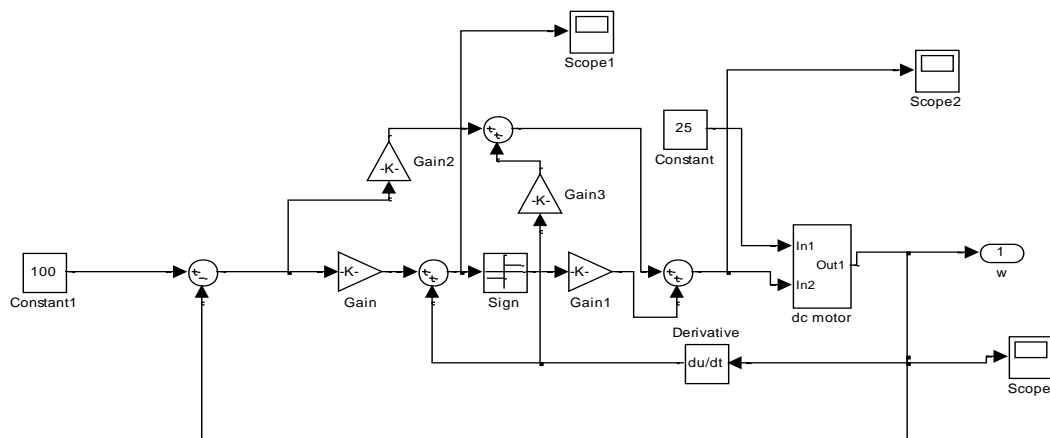


FIG-4 SIMULINK MODEL FOR DC MOTOR USING SMC

V. SIMULATION RESULTS

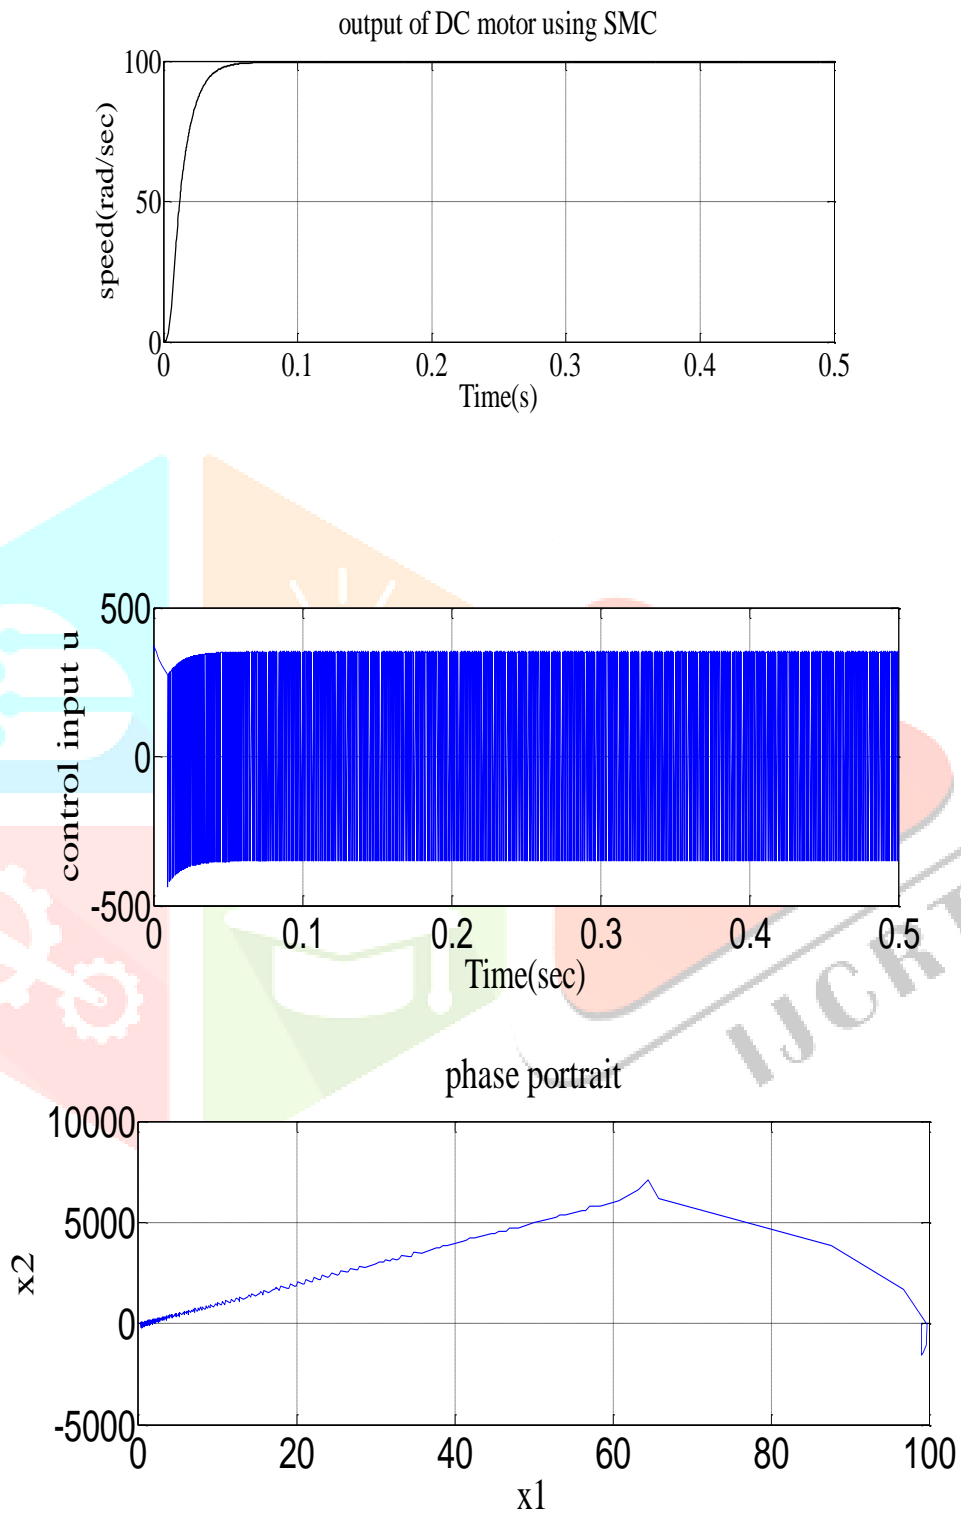

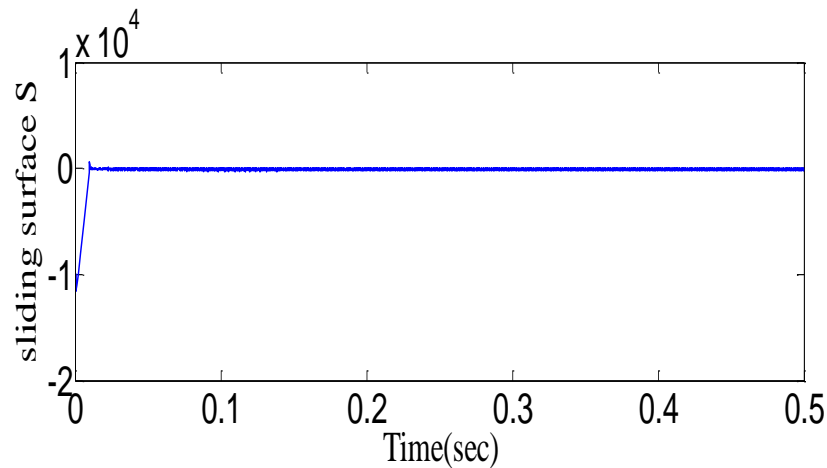

VI. REFERENCES

- [1] Vadim I. Utkin, "Variable structure systems with sliding modes", IEEE Transactions on Automatic Control, vol. AC-22, pp. 212–222, April 1977.
- [2] John Y. Hung, Weibing Gao and James C. Hung, "Variable structure control: A survey," IEEE Transactions on Industrial Electronics, vol.40, no.1, pp.2-22, February 1993.
- [3] K.D. young, V.I. Utkin and U. Ozguner, "A control Engineer's guide to sliding mode control," IEEE Transactions on Control System Technology, vol.7, pp.328-342, 1999.
- [3] Hung, J. Y., W. Gao and J. C. Hung (1993), "Variable Structure Control: A Survey," IEEE Transactions on Industrial Electronics, v.40, n.1, pp.2-22.
- [4] J. J. Slotine, "Sliding controller design for nonlinear systems," Int.J. Contr., vol. 40, no. 2, pp. 421-434, 1984.
- [5] J. Nilsson, 'Real-time control systems with delays', Ph.D. dissertation, Lund Institute of Technology, 1998.
- [6] K. K. Zhil'tsov, *Approximation Methods of Variable Structure System Design*. Moscow: Nauka, 1974 (in Russian).
- [7] J. Eker and A. Cervin. A Matlab toolbox for real-time and control systems co-design. In Real-Time Computing Systems and Applications, 1999. RTCSA '99. Sixth International Conference on, 1999.
- [8] A. Sabanovic and D. Izosimov, "Application of Sliding modes to induction motor control," IEEE Trans. IndustiyApplications, vol. LA-17, no. 1, pp. 41-49, 1981.
- [9] C. Edwards and S. K. Spurgeon, *Sliding mode control: Theory and Applications*. Taylor and Francis, 1998.
- [10] Bollepally Raju aMtech research 'Time delay compensationschemes with application tonetworked control system' at National Institute of Technology Rourkela 2009.
- [11] SrinibasBhuyanaMtech research, 'Development and control of networked servo system' at National Institute of technology, Rourkela 2011.
- [12] Katsuhiko Ogata, *Modern Control Engineering*, Upper Saddle River, NJ, Prentice Hall, 2002.
- [13] W.Gao and J.CHing, "Variable Structure Control of Nonlinear System, A new approach", IEEE Trans, Ind. Elec. Pp. 45-55, Vol.40 N 1, 1993.
- [14] D.S. Lee, M.J.Youn, "Controller design of variable structure systems with nonlinear slidingsurface," Electronics Letters, vol. 25, no. 25, pp.1715-1716, 1989.